


24F Outdoor Distribution box

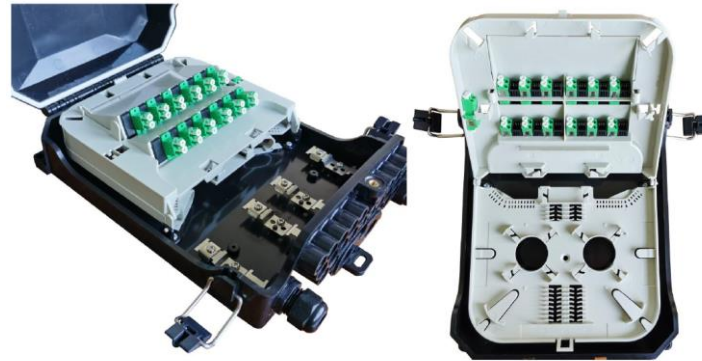

Description

The Outdoor distribution box designed for termination point for the feeder cable to connect with drop cable in FTTx communication network system. The fiber splicing, splitting, distribution can be done in this box, and meanwhile it provides solid protection and management for the FTTx network building.

Features

- ✓ Total enclosed structure
- ✓ IP65
- ✓ Clamping for feeder and drop cables
- ✓ Optional distribution panel for 24 SC adapters
- ✓ Pole/Wallmount installation




Specification and Dimensions

Technical	
Working Temp.	-40°C - +70 °C
Material	Plastic
UV Resistance	UV Resistance
Seal Material Box	EPDM
Seal Material ports	Rubber
Color	Grey RAL 7035
Protection Rating	IP65
Splitter	Up to 3 x 1/2x8 OR 1/2X16
Patching capacity	24 x SC / 48 X LC
Splice capacity	12/24C
MID-Span ports	2 X 14mm
Branch cables ports	2 x 14mm (2 X PG16)
Drop cables ports	24 x Max. 5mm
Box dimensions	290x208x93mm



Rev.1.1 – October 2020

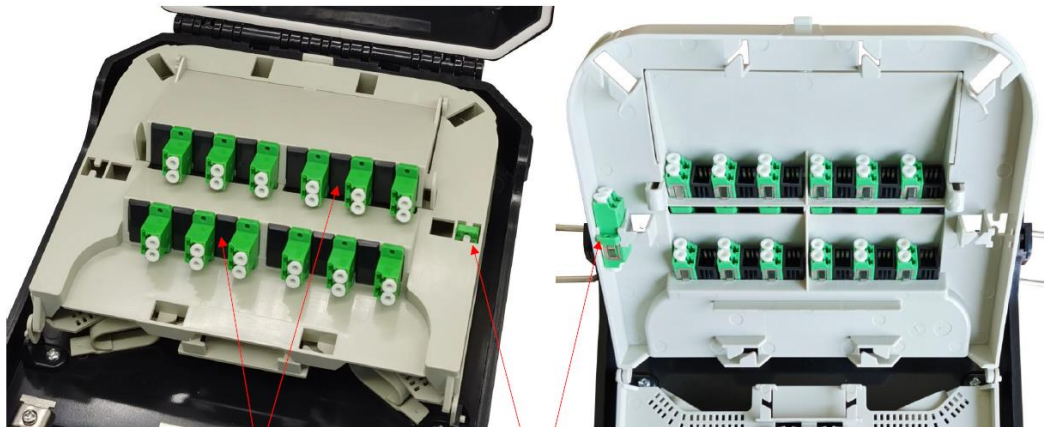

- 12 LC Duplex with comfortable interval for latch

-One LC duplex can be installed here exactly.

. Wall and pole mount kits



· Pole-mounting kits



Plastic cross arm: 2pcs



Metal clamp: 2pcs