
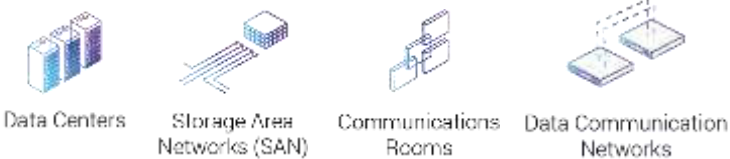


Cat.6A FTP Keystone Jack

The Cat.6A Keystone Jack is designed to snap into wall plates, patch panels, and surface connection boxes for quick, seamless deployment. Meeting and exceeding the international standard ISO / IEC 11801 and the ANSI/TIA-568-C.2 requirements, this RJ45 keystone jack provides the perfect solution for your Ethernet networks

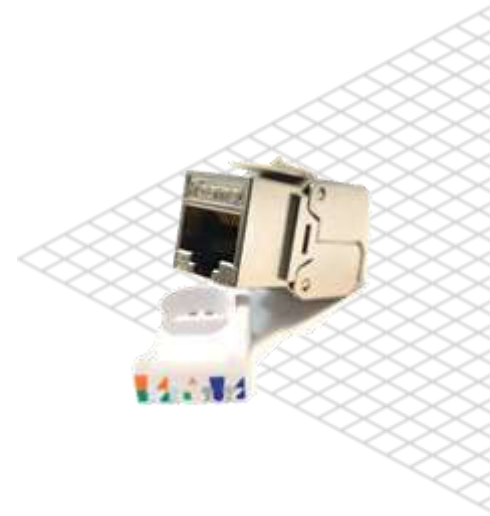

FEATURES

- Easy to use, tool less (no soldering or screwdriver req.) modular CAT 6A Keystone jack
- RJ45 female connector
- RoHS Compliant
- UL Verified
- All Plastic parts Zero Halogen Flame redundant: UL94-V0
- IDC Contacts: 22 - 26AWG
- Suitable for POE Plus applications in compliance with IEEE 802.3af (2003)
- Compatible with Fibernet Patch Panel 24 port and Fibernet Face Plate

STANDARDS

Compliant with the following standards:

- Easy to use, tool less (no soldering or screwdriver req.) modular CAT 6A Keystone jack
- RJ45 female connector
- RoHS Compliant
- UL Verified
- All Plastic parts Zero Halogen Flame redundant: UL94-V0
- IDC Contacts: 22 - 26AWG
- Suitable for POE Plus applications in compliance with IEEE 802.3af (2003)
- Compatible with Fibernet Patch Panel 24 port and Fibernet Face Plate
-

APPLICATIONS

- 10GBASE-T Ethernet
- 1000BASE-TX Fast Ethernet
- 1000BASE-T Gigabit Ethernet
- 100BASE-TX Fast Ethernet
- 10BASE-T Ethernet

SPECIFICATIONS

PARAMETER	VALUE
Storage Temperature	-10 ~ +60 °C
Operational Relative Humidity	-40 ~ +70 °C
Housing	Max. Non-condensing 93%
Insulation Resistance	Zinc Alloy Fully Shielded
Spring Wire Resistance	500 MΩ Min@100 VDC
IDC Contact Resistance	≤20 mΩ
Durability	≤2.5 mΩ
Retention	≥750 Cycles min.
Voltage Strength	1000 VDC or VAC Peak Contact to Contact 60 Hz for 1 Minute.
	1500 VDC or VAC Peak Contact to Panel 60 Hz for 1 Minute.

BUILD YOUR ORDER

CRF0374D-F/S