


# Outdoor Distribution box – 16C\_R

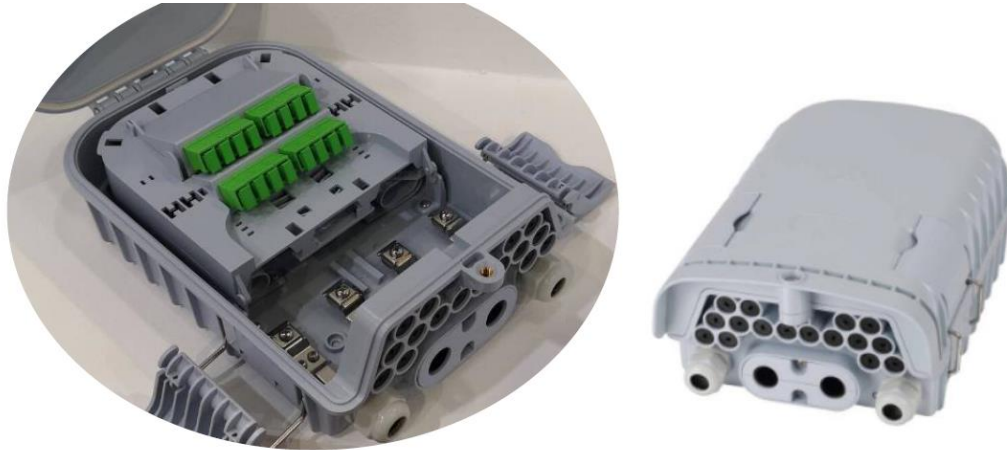

## Description

The Outdoor distribution box designed for termination point for the feeder cable to connect with drop cable in FTTx communication network system. The fiber splicing, splitting, distribution can be done in this box, and meanwhile it provides solid protection and management for the FTTx network building.

## Features

- ✓ Total enclosed structure
- ✓ IP65
- ✓ Clamping for feeder and drop cables
- ✓ Optional distribution panel for 12 SC adapters
- ✓ Wallmount installation


## Specification and Dimensions

Technical	
Working Temp.	-40°C - +70 °C
Relative Humidity	≤ 85% (+30 °C)
Atmospheric pressure	70KPa ~ 106KPa
Material	EPDM
Color	White or Grey
Max splice capacity	16C
Splitter	Up to 2 x 1x8 OR 1X16
Input port	Express port up to 14mm + 2 X PG13.5
Output ports	16 x 2-4.6mm
Box dimensions	287x172x100mm

Rev.1 – March 2018



**Accessories**

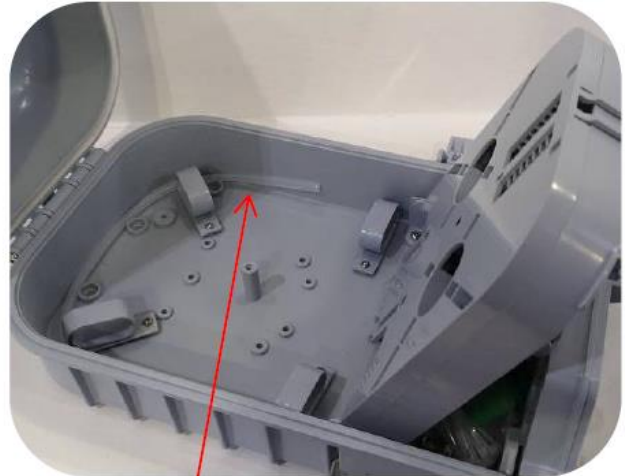

Buffer tube here

## Ordering Information

FOTB-16C-R – Outdoor distribution box splice only

FOTB-16C-R2 - Outdoor distribution box with Adapters plate