


Outdoor FTTx Distribution Box

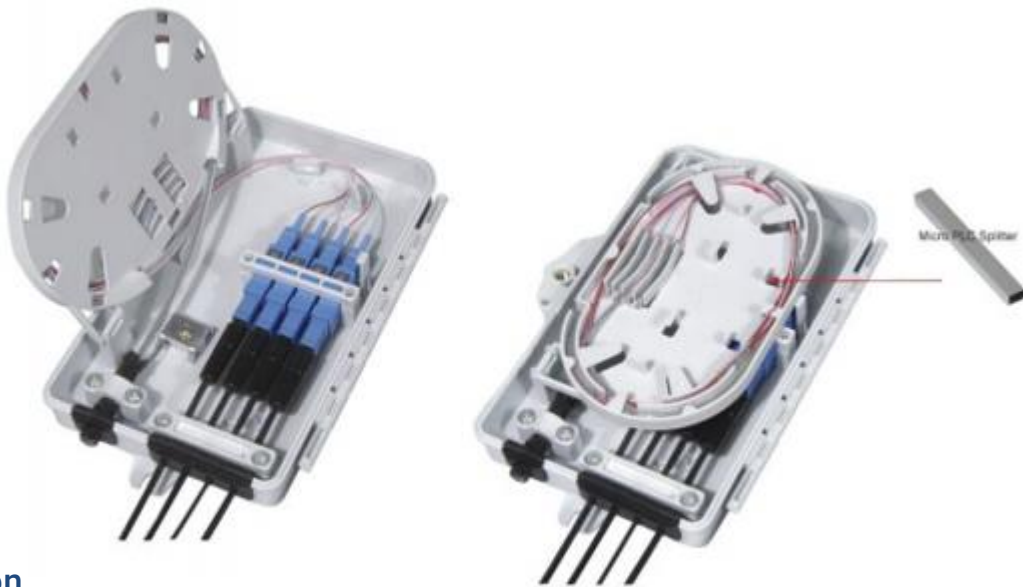

Description

Applicable for the FTTx project and provide mechanical protection for fiber management system that includes the functions of splicing, patching and passive component integration.

Rated to IP55, available for indoor or outdoor.

Features

- ✓ High quality engineering plastic construction.
- ✓ Standard key lock.
- ✓ Micro splitter 1:8 is applicable.
- ✓ Wall-mounted or pole-mounted is available.

Specifications and Dimensions:

Spec	Value
Dimension	213×163×47 mm
Max. number of SC adaptor	8 SC
Suitable for PLC Splitter	Micro splitter 1 : 8
Mounted way	Wall-mounted or pole-mounted
Material	Plastic
Temperature range	-40 oC to +70 oC.
Flame resistant	V0
Seal material of the box	EPDM
Seal material of the ports	Rubber
Protection rating	IP55



Ordering Information

P/N	Description
FTTX-P8SC	Outdoor FTTx Distribution Box For 8 SC