
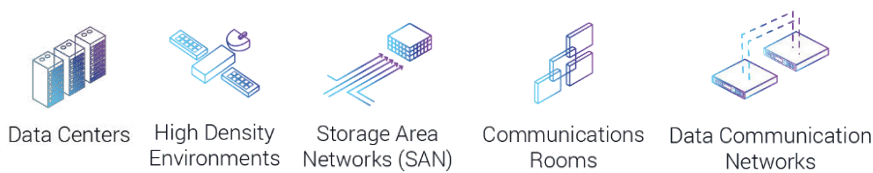


STAR400 MTP® Module

Extractable high-density modules, designed to provide easy management of Moves, Adds and Changes (MACs) of MTP® connections in your data center, as simple as Plug & Play.

The STAR400 features eight fibers configuration. Latest technology developments show that platforms using base-8 fiber count configurations feature maximum utilization of fibers and form the optimal platform for migration to a wide range of bit rates up to 400 Gb/sec Ethernet.

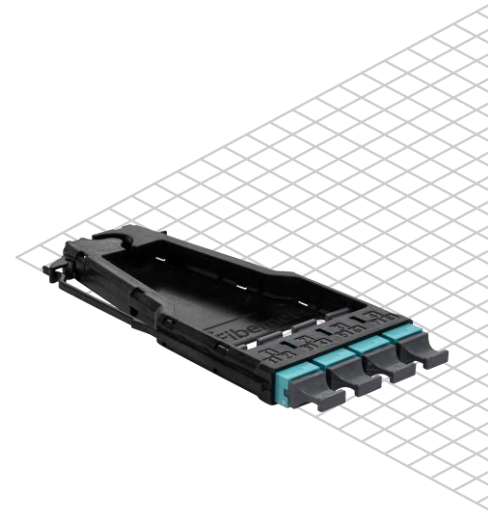

FEATURES

- High-density module designed to provide MTP® connection points between trunks and harnesses, ideal for plug-and-play systems
- Suitable for STAR400-1U, 1U FX, STAR400-2U and STAR400 4U
- Versatile high-density solution with compact, space-saving design
- Fast MAC by using Uni-Boot patch cords - which reduce 50% of front cabling volume (compared with duplex patch cord)
- 100% Testing of IL & RL
- Pre-terminated solution is ideal for easy installation, reliable performance and minimum downtime in the data center
- Enhanced access to the front, side and rear for quick loading or removal of modules providing smooth cable management and faster MACs

STANDARDS

Compliant with the following standards:

- IEEE 802.3ae 10 Gb/s
- IEEE 802.3ba 40Gb/s and 100Gb/s
- IEEE P802.3bs 400 Gb/s
- IEC 60793-2-10, applicable to A1a.2- OM3, A1a.3- OM4
- ITU-T G.657.A2, applicable to SM
- TELCORDIA GR-449-CORE, IEC 61754-7, IEC 61754-20, TIA-604-5 (MPO FOCIS 5), TIA-604-10 (LC FOCIS 10), TIA 568-C.3, IEC 60793-1, IEC 61755-3, IEC 11801 (OS2, OM3 and OM4), ITU-T G.651, TIA-492.AAAC, TIA 492.AAAD and TIA 942-A, IEC 60794-1, IEC 60794-2 and IEC 60874
- TIA 604-18 (FOCIS 18), IEC (61754-7-3)
- RoHS
- UL94-V-0
-

SPECIFICATIONS

Parameter	Value
Fibers	32
Adapter color	SM: Black / Green (APC)
	OM3/OM4: Aqua
Operating Temperature	-20°C ~ +70°C
Dimensions (D x W x H)	142 x 69 x 12 mm

SHIPPING INFORMATIONS

PARAMETER	LENGTH	WIDTH	HEIGHT
(cardboard carton) Dimensions	230 mm (9 ins.)	110 (4.3 ins.)	10 (0.4 ins)
Packed weight	0.1 Kg (3.5 oz..)		

BUILD YOUR ORDER

Example:

STAR400-A-GMTU6

MTP Module, OM4 BI Fiber, UPC Polish, Six MTP Adapters

